

**Dynamic Microphone with Gooseneck**



*Suitable for control desks, table- or wallmounting as well as mounting into cars  
Microphone capsule protected against structure-born sound  
Matt silver or matt black*

*Available with following matched frequency characteristics:*

*A: For use in proximity (distance approx. 5 cm) - e.g. als talk-back microphone*


*B: For wide-band transmission at mean speech distance (approx. 30 cm) - e.g. for PA systems*

**Technical specification**


Housing .....	stable metal housing	
Colour .....	matt silver or matt black	
Dimensions .....	microphone: diameter 32 mm, length 65 mm	
Weight .....	approx. 90 g without gooseneck	
Terminals .....	PUR-cable, 2-cored, length approx. 110 cm, ends tinned	
Screw thread at gooseneck .....	M10x1, thread length 9 mm	
Degree of protection .....	IP 40	<i>acc. to DIN EN 60529</i>
Temperature range	operation:.....	-30 °C up to +60 °C
	storage:.....	-40 °C up to +80 °C
Acceptable relative humidity .....	≤ 93 %	<i>Nb acc. to DIN EN 60068-2-14</i> <i>Nb acc. to DIN EN 60068-2-14</i> <i>Db acc. to DIN EN 60068-2-30</i>

**Electroacoustic specification**

Directional characteristic.....	supercardioid	
DC resistance .....	50, 200 or 600 Ω	
Free-field no-load sensitivity .....	version A: 0.7 mV/Pa	<i>[(-63 ± 3) dB, rel. 1 V/Pa], R = 200 Ω, f = 1 kHz</i>
	version B: 1.6 mV/Pa	<i>[(-56 ± 3) dB, rel. 1 V/Pa], R = 200 Ω, f = 1 kHz</i>

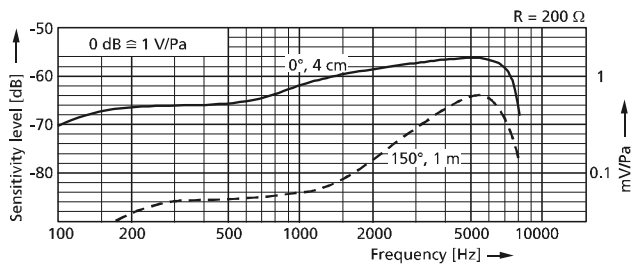

Version A (for use in proximity)

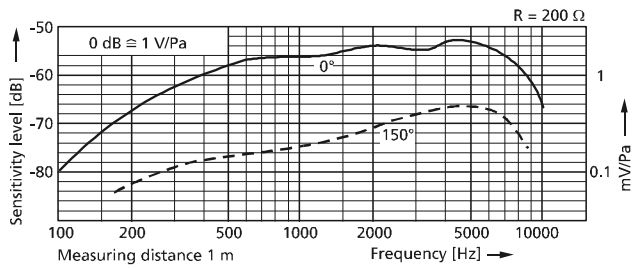

Version B (for mean speech distance)

Included in delivery

Microphone with gooseneck, installation material (nut M10x1, lock washer)

<b>Order details</b>				
<b>Frequency response</b>	<b>Colour</b>	<b>Gooseneck</b>	<b>Part No.</b>	<b>DC resistance</b>
<b>A</b>	silver	∅ 13 x 200 mm	82-03-08274	200 Ω
	black	∅ 13 x 250 mm	82-03-08775	
	black	∅ 15 x 400 mm	82-03-09284	
<b>B</b>	silver	∅ 11 x 200 mm	82-03-08538	
	black	∅ 11 x 250 mm	82-03-09575	
	silver	∅ 13 x 200 mm	82-03-08207	
	black	∅ 13 x 200 mm	82-03-09585	
	silver	∅ 13 x 300 mm	82-03-08385	
	black	∅ 13 x 300 mm	82-03-08153	
	black	∅ 13 x 400 mm	82-03-05782	
silver	∅ 15 x 300 mm	82-03-09173		
Other goosenecks on request. Fitted amplifier on request.				